

Multi Loose Tube Cable

ID: **CE01**




KABELOVNA Děčín Podmokly s.r.o.
Ústecká 840/33, 405 33 Děčín 5
Czech Republic
DIČ CZ26759993
tel.: +420 412 706 222
www.kabelovna.cz

4.7.2014 ver.3

A-DQ(ZN)2Y HD WBF 6×1,7 max. 72F

This cable is suitable for outdoor use. The cable has standard level of rodent protection.

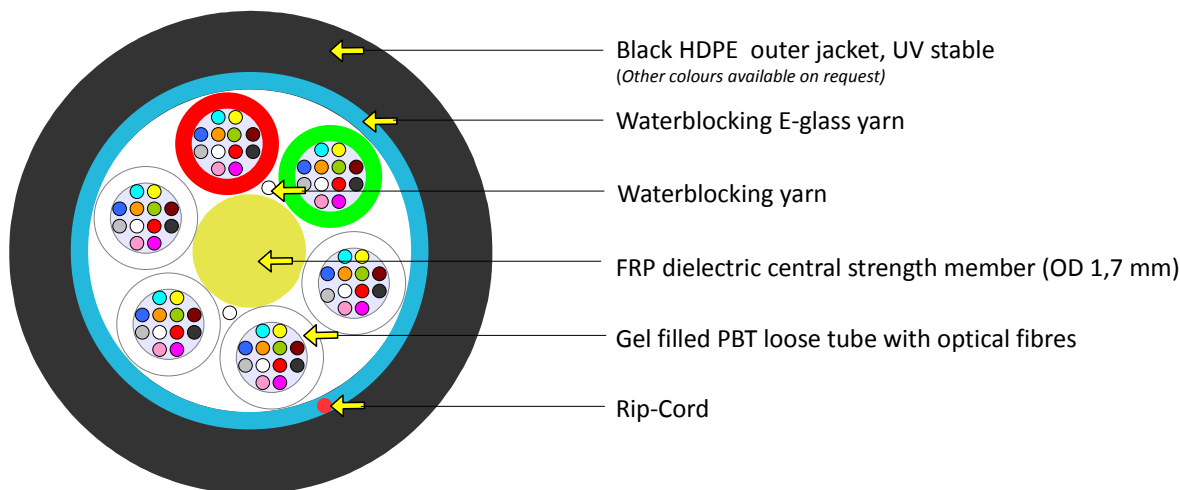

Order example

2100 m A-DQ(ZN)2Y HD WBF 72E9/125 G.652D jacket colour BLK, cable specification CE01

Fibre colour coding

According to IEC 60304

1 Red	7 Brown
2 Green	8 Violet
3 Blue	9 Turquoise
4 Yellow	10 Black
5 White	11 Orange
6 Grey	12 Pink

Other fibre colour sequences available on request

Tube colour coding

- 1 Red
- 2 Green
- 3-6 White

in the case of lower number of fibres some tubes are replaced by uncoloured fillers
Other tubes colour sequences available on request

Fibre Type

Single mode fiber 9/125
Multi mode fiber 50/125
Multi mode fiber 62,5/125
See the Fibre Specification sheet

Sheat Marking

Print colour White
Print method INK-Jet or Hot foil
Print legend manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Packaging Standard put-up length / Drum size

Plywood	2100 m	1000×640×600
	4100 m	1200×640×600

Multi Loose Tube Cable

ID: **CE01**



KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

3.7.2014 ver.3

A-DQ(ZN)2Y HD WBF 6×1,7 max. 72F

Mechanical and Environmental properties

Test	Value	Unit	Method	Comment
Cable outer diameter	8,2 ± 0,4	mm	EN 60811-1-1	
Cable weight	64	kg/km		- calculated
Outer jacket thickness	1,5 ± 0,2	mm		
Loose tube diameter	1,7	mm		
Max. tensile strength	1900	N	EN 60974-1-2-E1	- max. fiber strain 0,33% - long term 900 N - no fiber strain for long term load - max. attenuation variation ≤ 0,1 dB at 1550 nm, reversible - no increase attenuation after the test
Crush resistance test	2000	N	EN 60974-1-2-E3	- plate dimensions 100×100 mm - max. attenuation variation ≤ 0,05 dB at 1550 nm, reversible - duration of loading 1 min.
Impact resistance test	3	Number of impact	EN 60974-1-2-E4	- impact energy 5 Nm, slightly damaged jacket - impact energy 15 Nm, no jacket cracking - max. attenuation variation ≤ 0,05 dB at 1550 nm reversible
Min. bend radius (no load)	15	× OD	EN 60974-1-2-E11a	- max. attenuation variation ≤ 0,05 dB at 1550 nm, reversible
Min. bend radius (load)	20	× OD	EN 60974-1-2-E11b	- max. attenuation variation ≤ 0,05 dB at 1550 nm, reversible
Moisture resistance test	pass		EN 609794-1-22-F5	- water height 1 m - sample length 3 m - no leakage on free sample end - duration of test 24h
Temperature range	Installation	-15 to +50°C	EN 60794-1-22-F1	- max. attenuation variation ≤ 0,05 dB at 1550 nm, reversible - Dwell time in max. temperature 24 hours. - When installing or assembly under temperature below 5°C cable has to be stock in temp of 20°C at least 24h before installation.
	Operation	-40 to +70°C		
	Storage	-40 to +70°C		

Cable life time - minimum 30 years

