



MINI Steel Tube PLC Splitter




1X2 Micro PLC Splitter

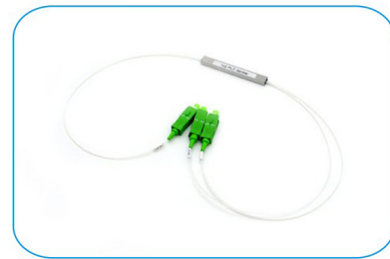


1X4 Micro PLC Splitter

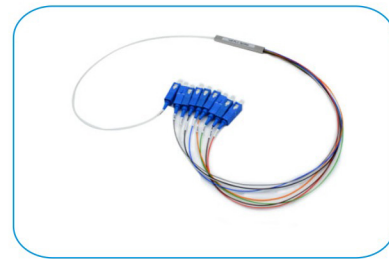

1X8 Micro PLC Splitter

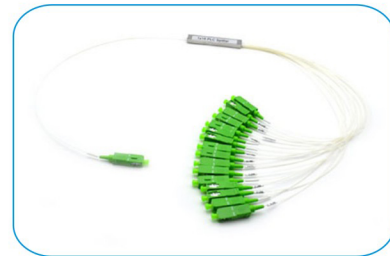


1X16 Micro PLC Splitter

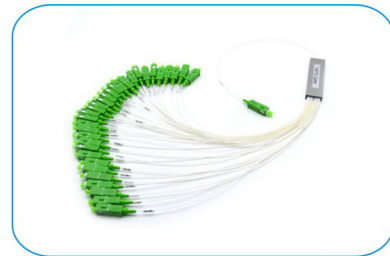

1X32 Micro PLC Splitter



1X64 Micro PLC Splitter

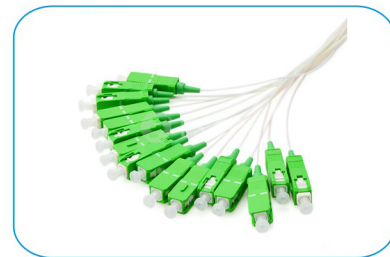

The Other Information

ITEM	Technical Parameters
Fiber Type	G657A1
Outer diameter	900um
Tube Material	Hytrek
Tube Colour	Translucent or Chromatic
Input endface Length	≥0.3m
Output endface Length	≥0.3m
Connector Type	SC, FC, LC or none

With Connector Loss

ITEM	1x2	1x3	1x4	1x6	1x8	1x12	1x16	1x24	1x32	1x64	2x2	2x4	2x8	2x16	2x32	2x64
Operating Wavelength (nm)																
MAX.Insertion Loss (dB)	4.3	6.5	7.5	10.0	11.0	13.0	14.0	16.5	17.0	21.0	4.5	8.0	11.7	14.7	17.9	21.2
MAX.Channel Uniformity (dB)	0.6	0.6	0.6	0.6	0.8	1.0	1.2	1.5	1.5	1.8	0.8	1.0	1.0	1.5	2.0	2.5
MAX.PDL (dB)	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.2	0.3	0.3	0.3	0.4	0.5
Directivity (dB)	≥55															
Return Loss (dB)	≥55															
Storage Temperature (°C)	-40..... +85															
Operating Temperature (°C)	-40..... +85															

Packaging size

Product Model	1x2, 1x3, 1x4, 1x6 1x8, 2x2, 2x4, 2x8	1x10 1x12, 1x16	2x16	1x32	2x32	1x64, 2x64
L*W*H (mm)	60x7x4	60x12x4	80x12x4	80x20x6	100x20x6	100x40x6

Packaging

